


Trimod[®] Besta

Trimod Besta Füllstandschalter

Trimod Besta Level Switch

Trimod Besta Contrôleur de niveau

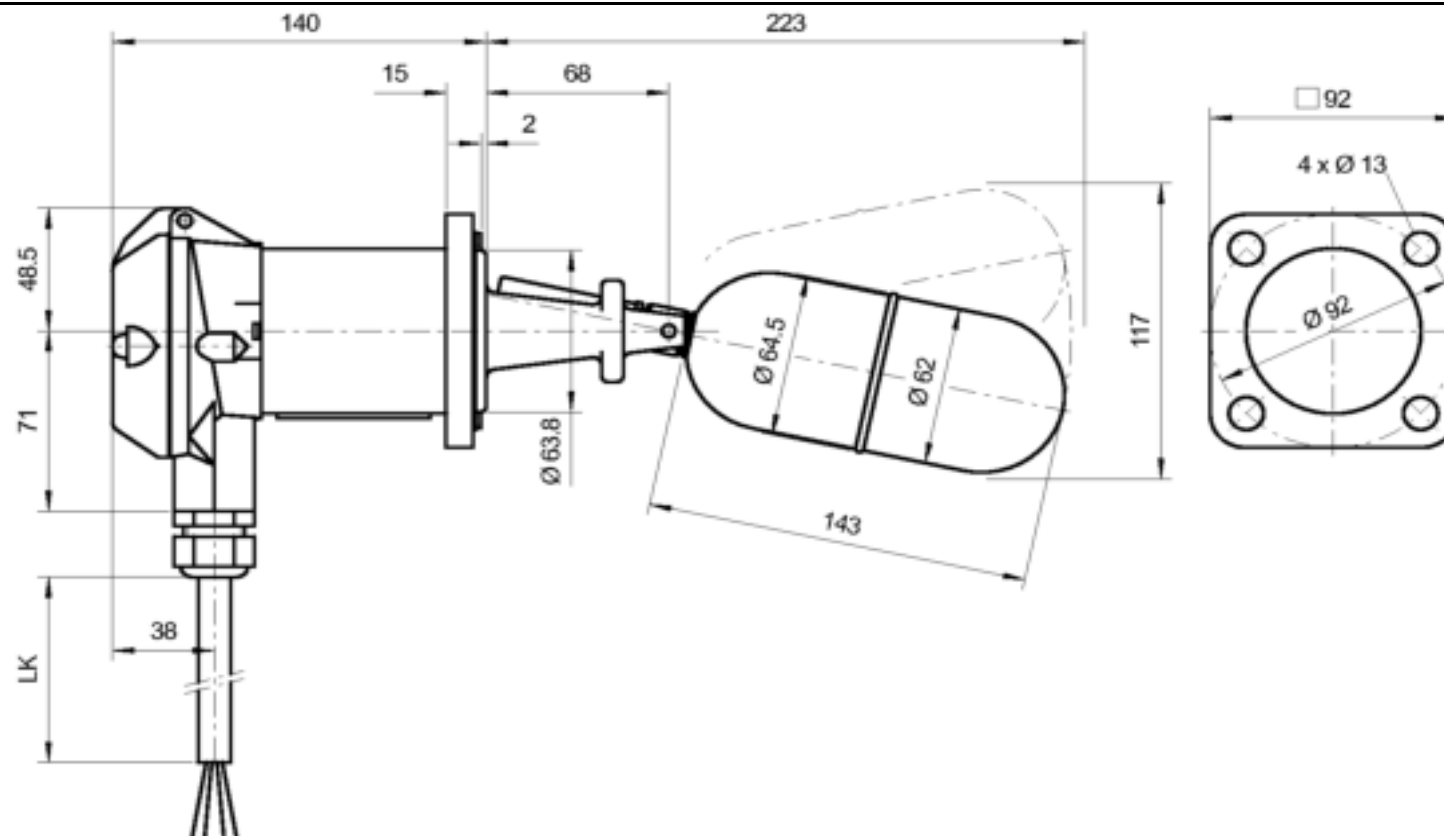

Gasket Ø77/64x2 Blue Gard 3000

Typ	U5A 01 04	Schaltmodul	U5A	Flanschmodul	01	Schwimmermodul	04	Order no.
Type		Switch module		Flange module		Float module		Stk./ pcs./quant.
Type	(Art. no. A415695)	Module de commande		Module de bride		Module de flotteur		Date/Visa 10.12.15 / SIA
Betriebstemperatur	-30 to 80°C	Gehäusematerial	Aluminium chromated	Nennndruck / -weite	PN 25	Schaltdifferenz	12 mm	 Bachofen AG, Ackerstrasse 42 CH-8610 Uster/Switzerland Phone +41 44 944 11 11 Fax +41 44 944 12 33 info@trimodbesta.com www.trimodbesta.com 011015/TSI
Operating temp.		Housing material	Sea water resistant	Nom. Pressure / -Diameter		Operating diff.		
Temp. de service		Matériau boîtier		Pression- / Section Nominal		Différentiel		
Umgebungstemp.	-30 to 80°C	Kabeleinführung	M20 x 1.5	Norm	Besta	Dichte min.	0.700 kg/dm³	
Ambient temp.		Cable entry		Standard		Density min.		
Temp. d'ambiance		Presse-étoupe		Norme		Densité min.		
Schaltleistung	5A / 250VAC	Schutzart	IP68	Dichtungsart	PN 25 bar	Nenn- / Prüfdruck	PP 38 bar	
Switch rating	5A / 30VDC	Enclosure	cable moulded in connection area	Flange Facing	Raised face	Nominal / Test press.		
Pouvoir de coupure		Cl. de protection		Type d'étanchéité		Pression nominal / d'épreuve		

Safety Integrity Level: **SIL 1**
(SIL 3 capable)

Dimensionen / Dimensions mm

Lk	5 m		

Ship register certificate:

N/A

Überwurfflansch

Slip-on flange --

Bride folle

Schmelze / Heat no:

Bachofen-Nr. / Bachofen no:

Dichteinheit / Fixflansch

Sealing unit / Fixed flange 1.4408

Unité d'étanchéité / Bride fixe

Schmelze / Heat no:

Bachofen-Nr. / Bachofen no:

Schwimmer

Float 1.4571

Flotteur